



A Strong Combination

**Type 5757-3 Electric Actuator with Process Controller
for domestic hot water heating in instantaneous
heating systems**



Benefits for you

- Compact design
- Optimized for district heating or local heat supply networks
- Simple and fast installation
- Automatic deactivation of motor when reaching end positions
- Fast control response
- Automatic adaption to varying network conditions
- Control using two different set points
- Function to maintain the water temperature constant, preventing the heat exchanger from cooling down between tapping
- High quality and excellent control performance at a low price
- Reversible direction of action for cooling applications
- Limit value monitoring

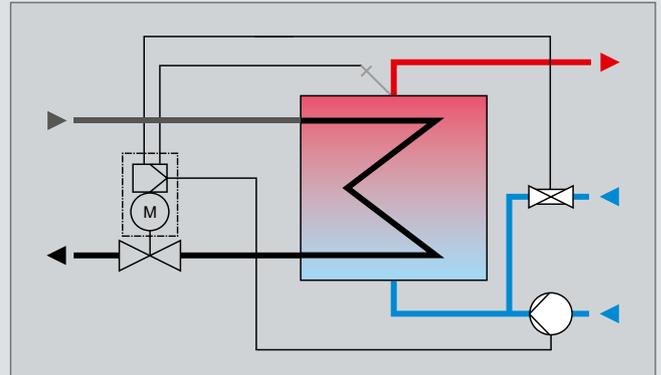

Standard application for domestic hot water heating in instantaneous heating systems with tapping detection and pump control

Options

- TROVIS-VIEW software for configuration, operation and diagnostics
- Memory pen for data exchange including data logging and diagnostics
- Flow rate sensor to detect when water is being tapped
- Fast-response Pt 1000 sensor
- Sensor pocket to fit Pt 1000 sensor

